

1000 BASE-T MAGNETICS MODULES

Designed to Support 1:1 Turns Ratio Transceivers



Suotek®

- 1) Designed for long haul Gigabit Ethernet (10/100/1000BASE-T) full duplex applications .
- 2) Supports 4 pairs of category 5 UTP cable .
- 3) Cable interface for isolation and low common mode emissions .
- 4) Compliant with IEEE 802.3ab standard for 1000 Base-T.




Electrical Specifications @ 25°C --- Operating temperature 0°C To 70°C .

P/N : S24-5004


Insertion Loss (dB Max)	Return Loss (dB Min. @ 100 ohm)					'Differential to Common Mode Rejection (dB Min.)			Crosstalk (dB Min.)			Hi-POT
1~100MHz	1~30MHz	40MHz	50MHz	60~80MHz	100MHz	30MHz	60MHz	100MHz	30MHz	60MHz	100MHz	1mA/ 1 S
-1.0	-18	-14	-13	-12	-10	-43	-37	-33	-43	-37	-33	1500

Mechanical Dimensions (Unit: inches / mm)

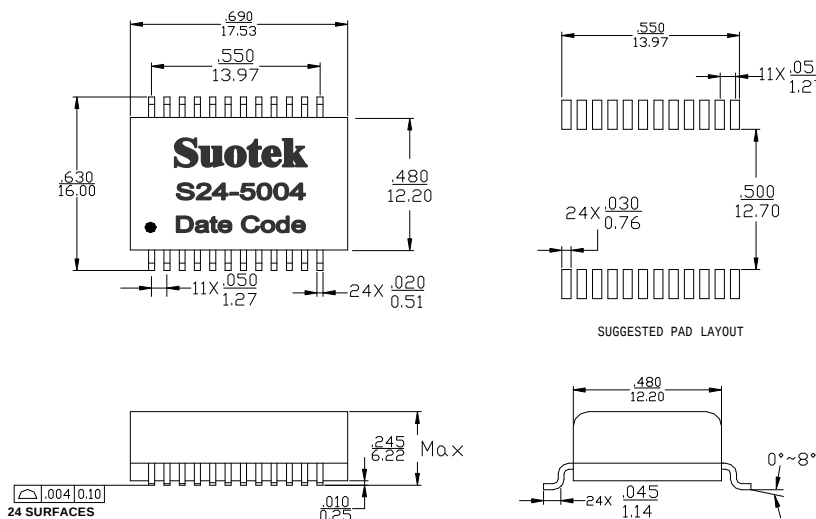

Unless otherwise specified, all tolerances are $\pm 0.010 / 0.25$

Schematics

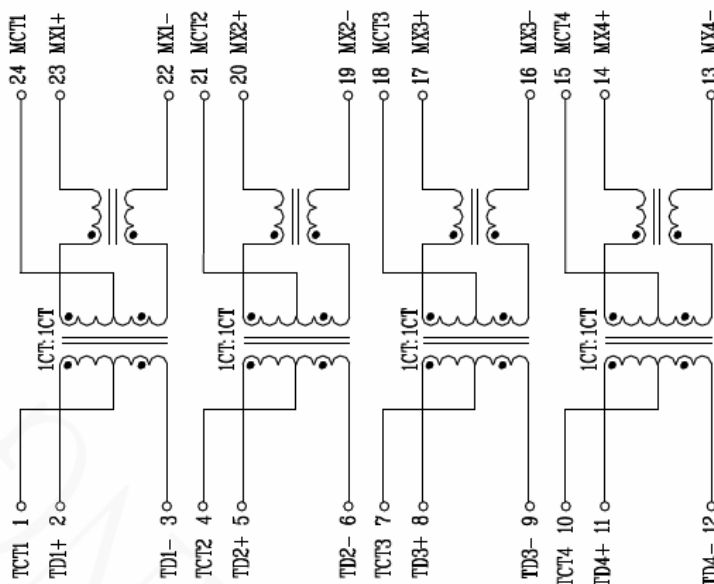

SUOTEK ELECTRONICS COMPANY LIMITED

Tel: 86-769-86318023 Fax : 86-769-86318022 Website: www.suotek.com E-mail: sales@suotek.com

Lan0121