


- 



Part Number : S24C-5009

Insertion Loss (dB Max)	Return Loss (dB Min. @ 100 ohm)					Differential to Common Mode Rejection (dB Min.)			Crosstalk (dB Min.)			Hi-Pot Vrms Min.
1~100MHz	1-30MHz	40MHz	50MHz	60-80MHz	100MHz	30MHz	60MHz	100MHz	30MHz	60MHz	100MHz	1500V
1.0	-18	-18	-16	-12	-10	-43	-37	-33	-45	-40	-35	

Mechanical drawing of the Suotek S24C-5009 package. The package is rectangular with dimensions 15.20 (width) and 7.50 (height). The pin pitch is 0.42. The package is labeled with "Suotek", "S24C-5009", and "DATE CODE". The drawing shows the pin layout and dimensions for the package.

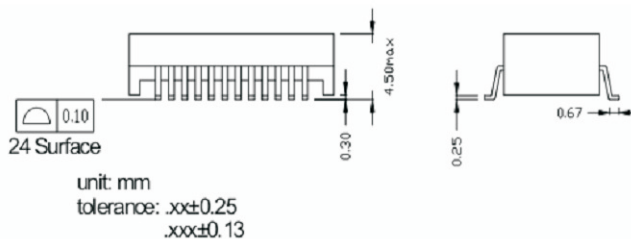

Tel: 86-769-86318023 Fax : 86-769-86318022 Website: www.suotek.com E-mail: sales@suotek.com